
How to use the DYMO home

LABELMAKER

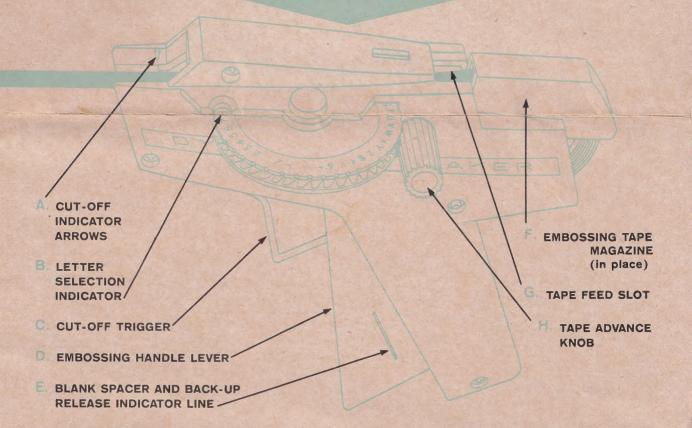

PQRS

LOADING

Select a Tape Magazine. Pull out one inch of tape. Slip tape into the Tape Feed Slot (G) and snap magazine in place. Advance tape by turning Tape Advance Knob (H) forward until 1/4" extends past end of Labelmaker. Cut off by pulling Cut-Off Trigger (C). Pull out small piece of tape...you are now ready to start embossing your label.

MAKING THE LABEL

Dial the Letter Wheel until desired letter shows in the half-circle Letter Indicator (B). Squeeze Embossing Handle Lever (D) firmly. Release. Repeat for each letter. To space between words, pull back Embossing Handle Lever (D) to Blank Spacer Indicator Line (E). Release.

TO CENTER

AND CUT OFF

After you have completed your last letter, advance tape with Tape Advance Knob (H) until last letter aligns with Cut-Off Indicator Arrows



APPLYING THE LABEL

You will find that DYMO tape sticks permanently to almost any surface. To obtain professional, lasting results, follow these easy directions: Hold tape by edges to avoid touching adhesive. Pull down tab end of tape to strip off protective backing. To apply label, first stick down one end and then "roll" label down. Rub briskly with thumb.



For More Space ... for Less Space on Ends of Label

You may like more blank space before and after your message on your label to wrap around items or to cover a greater area. Before starting your message, advance the tape the desired number of spaces with the Tape Advance Knob (H). When the message is completed, advance the tape the same number of spaces past the last letter.

You may like less blank space before and after your message so your label will fit into a small space. Just trim the tape with scissors or a knife.

To Change Tape Magazines

0

With your Labelmaker in the start position, squeeze the Embossing Handle Lever (D) to the Blank Space Indicator Line (E) on the Lever. Hold Lever in this position, and turn the Tape Advance Knob (H) backwards. Continue turning this Knob until the tape has been wound back and released from the feed mechanism. Pull out the Embossing Tape Magazine (F). Release Lever. You are now ready to re-load.

Problem Surfaces . . . Weather Conditions DYMO labels will stick to almost any surface that is clean and free from oil or grease.

- Use non-residual solvents such as alcohol, acetone. etc., to clean surface where required.
- If surface is rough or porous (such as unfinished wood, plaster, concrete, etc.) coat it first with a sealer such as shellac or lacquer.
- If surface is wet or moist dry off the surface. Once stuck, dampness or water will not affect the label.
- Outdoors . . . DYMO labels stand up excellently in any weather.
- Dymo plastic labels should not be applied to surfaces which reach temperatures over 140° F. such as coffee pots.

DID YOUR LABEL:

Show letters instead of blank spaces?

You're squeezing Embossing Handle Lever too far back—it's embossing instead of spacing. Squeeze only to line marked on Lever.

Have white spots around the letters?

You're squeezing too hard ... use slightly less pressure.

Emboss letters too lightly?

You are either a) not pressing Embossing Handle Lever hard enough and therefore not producing **embossed** letters, or b) you are squeezing too hard and are "over" embossing, thereby losing the crisp white letters.

Jam or stick?

It should always work easily - never jam or stick. If, however, tape does not feed properly, a) to make sure no tape ends are lodged inside, turn Labelmaker upside down, press small blunt object (such as ball point pen) against bottom of pin under the Letter Wheel. This will force out the pin that holds the wheel in. Remove wheel — shake out tape ends. Replace wheel and pin; b) remove tape magazine from Labelmaker, cut off bent end of tape. Reload.

CAUTION:

- Be careful not to drop the Labelmaker. It is strong and sturdy, but since it is a precision-engineered tool, it can be thrown out of alignment by rough treatment.
 - The Labelmaker never requires lubrication of any kind. DO NOT OIL it will make the tape slip.

Certificate of Warranty


DYMO LABELMAKERS are warranted to be free from defects in workmanship and materials. DYMO INDUSTRIES, INC. will replace or repair defective parts, without charge, and will provide complete repair service at fair rates and furnish replacement parts at reasonable prices throughout the normal life of the unit. Final decision as to defects rests solely with DYMO INDUSTRIES, INC. and said warranty will not apply to any unit which has been repaired or altered outside the factory or authorized service station in any way as to affect its stability or reliability, or in which other than genuine factory parts have been installed or which has been subject to misuse or negligence. For repair service, carefully pack and return your machine, postage prepaid, to the DYMO office or authorized service station nearest you, with a note describing trouble. Your LABELMAKER will be returned promptly.

DYMO INDUSTRIES, ING.



You'll find hundreds of uses for DYMU home




























ORGANIZE... WORKSHOP, KITCHENS, ITEMS IN STORAGE








PERSONALIZE... POCKET ITEMS, LUGGAGE, GLASSES, ETC.













DYMO TAPES IN 10 KEY COLORS

TAPES in handy disposable magazines come in 10 high-gloss finish colors. Choose from these colors to add beauty to labeled articles and for convenience of color coding when using labels for organizing. When you desire labeled surface color to show through, use the clear tape.

ORANGE BROWN BLUE BLACK GREEN YELLOW GREY RED CLEAR GOLD



YMO INDUSTRIES, INC

Berkeley, California, U.S.A.

Dymo of Canada Ltd.

Toronto, Ontario, Canada

Dymo International, S.A.

Lausanne, Switzerland

FORM NO. 402 (REV. 2) PRINTED IN U.S.A.
© 1963 Dymo Industries, Inc., Berkeley, Calif.